


Sushi Conveyor Example

Straight layout with footrest Type SC85-002

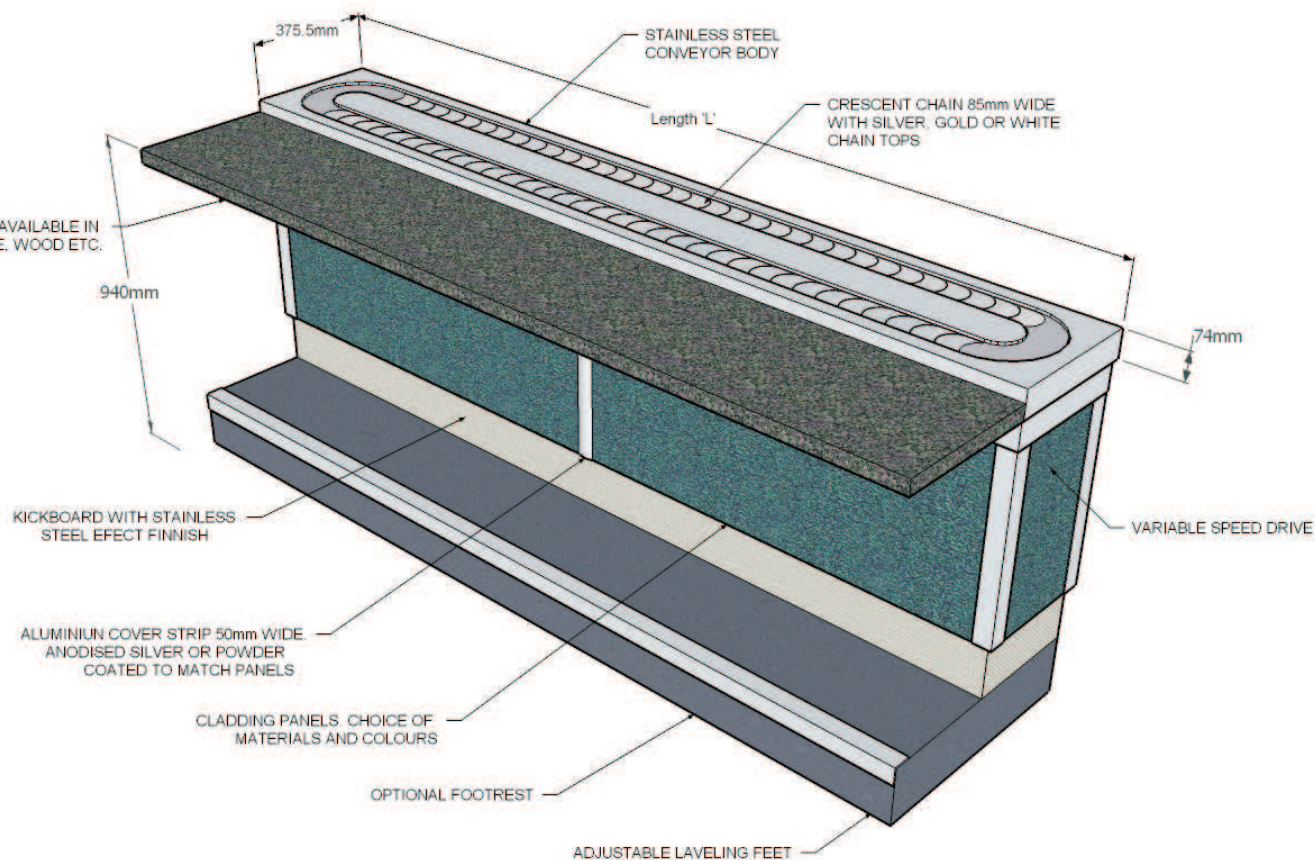

- The popular straight twin lane conveyor can be easily positioned in a restaurant.
- Seating can be arranged on both sides where practical.
- Shown here with a customer counter and footrest on one side, also available on both sides.
- Commonly used modules are straight sections, corners and tees.
- One arrangement is to have the end of the conveyor protruding into the kitchen area for easy loading.
- Standard lengths for each side are from 1.7m to 25.1m in 0.6m increments, over outside of conveyor.
- Drive and idler ends are 0.55m long and straight sections are 2.4m, 1.2m and 0.6m long.
- Support frame, footrest, cladding are optional.
- Customer counters can be supplied in Corian acrylic, granite, glass, wood, plastic laminate etc.